# **Model 303-4**

**Kingston Hoist Control Valve** 




### **Features**

- Designed to Operate Various Lifting Devices Utilizing Compressed Air (or Oil) as a Power Source
- · Constructed from Heavy Cast Brass
- Internal Components of Precision Machined Brass Bar Stock, Stainless Steel Springs, Stainless Steel Inlet Screen, and Buna-N Seals
- Positive Air Control is Achieved by the Cam Action of the "Dead Man" Style Lever
- Widely Used on Automobile, Truck Hoists, and Spring Loaded Single Acting Cylinders
- Maximum Operating Pressure is 200 PSIG

Model	Dimensions Height (A)	(inches) Width (B)	Pressure Range (PSIG)	Approx. Shipping Wt.
303-4	6-19/32"	4-3/4"	10-200	2 lb. 1 oz.


### **Materials**

No.	Part Name	Materials
1	Body	Brass
2	Cap	Brass
3	Spring	Stainless Steel
4	Lever	Stainless Steel
5	Pin	Leaded Steel
6	Snap Ring	Carbon Steel
7	Rocker Arm	Stainless Steel
10	Disc	Buna "N"
11	Disc Cage	Brass
12	Stem	Brass
13	Stem Nut	Brass
14	Stem Assembly, Item	
	No. 10, 11 12, 13, & 15,	
15	"O" Ring	Buna "N"
16	Screen	Stainless Steel

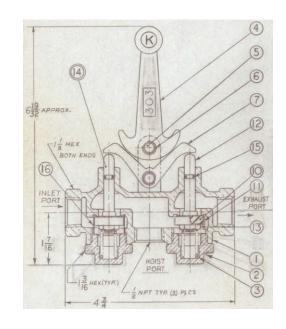

# Kingston Model 303-4 Control Valve

# **Flow Capacity Information**

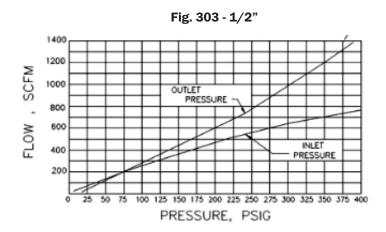

## **Ordering Information**

# Kingston Control Valves Part Number Codes Valve Model -303 Size 4= 1/2" NPT

Example: 303-4

### **Product Notes**

Storm Manufacturing reserves all rights. Product specifications and designs are subject to change without notice.

The information contained herein by Storm Manufacturing Group (SMG) is provided in good faith and as a product guide only. Further, SMG makes no representation as to the completeness or accuracy of the information contained herein. Any person or persons using the information contained herein must exercise their own judgement and consider all local, regional, national and global safety standards in evaluating valve selection options. Final application design and integration of Kingston Products are the sole responsibility of the end user.

